## TriFit TS™

Conformity and versatility with stability.



## TriFit TS™


Based on an optimised bi-planar geometry<sup>1,2</sup>, TriFit TS<sup>™</sup> is designed for patient fit.

## Stability, conformity and versatility

Optimal geometry defined for a patient matched solution. Design based on extensive 3D analysis of global CT data.<sup>3</sup>

Optimised proximal-to-distal ratio and proximal flare designed to provide stability. The stem is designed to fill the largest M-L dimension of the femoral canal.

Instrumentation suitable for minimally invasive surgical approaches and anatomical preservation. Designed to seat exactly within the pre-prepared bone bed.

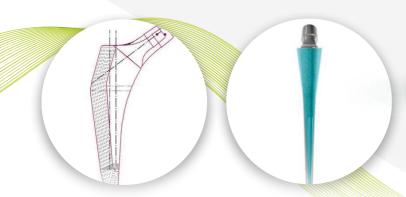



Burt, C., Garvin, K., Otterberg, E. and Jardon, O. (1998). A femoral component inserted without cement in total hip arthroplasty. A study of the Tri-Lock component with an average ten-year duration of follow-up. J Bone Joint Surg Am., 80(7), pp.952-960.

Data on file. Corin Group.



coringroup.com

©2019 Corin P No I1539 Rev0 10/2019 ECR2452